
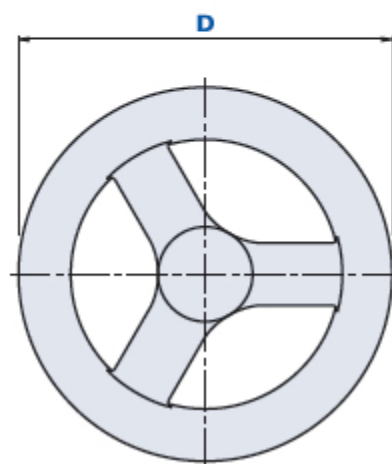


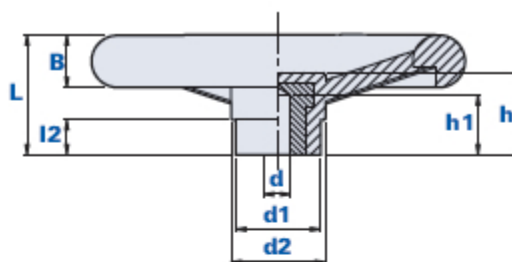

| Code         | Description   | Dimensions |    |    |    |    | Insert |     |    |    | Weight grams | Stock |
|--------------|---------------|------------|----|----|----|----|--------|-----|----|----|--------------|-------|
|              |               | D          | L  | B  | d2 | I2 | h      | dH7 | h1 | d1 |              |       |
| 122000015000 | 1220 - 150/10 | 150        | 48 | 21 | 38 | 14 | 34     | 10  | 24 | 34 | 304          | -     |
| 122000020000 | 1220 - 200/10 | 200        | 62 | 26 | 45 | 14 | 47     | 10  | 30 | 40 | 616          | -     |
| 122000020160 | 1220 - 200/16 | 200        | 62 | 26 | 45 | 14 | 47     | 16  | 30 | 40 | 616          | -     |

### Material

Polyamide-based (PA) technopolymer. Resistant to organic and inorganic chemical substances such as oils, greases, fuels and solvents.

### Colour

Black with shiny finish.

### Insert

Zinc-passivated steel with standard blind hole with tolerance H7.

Special inserts on design and/or in brass/stainless steel, on request for suitable quantities.

### Remarks

On request, for small/medium quantities, we execute threaded holes for fixing the handwheel on the shaft or keyways.

### Package

1 - 5 - 10 pcs.