


## Adjustable clamping lever with threaded bush and high hub

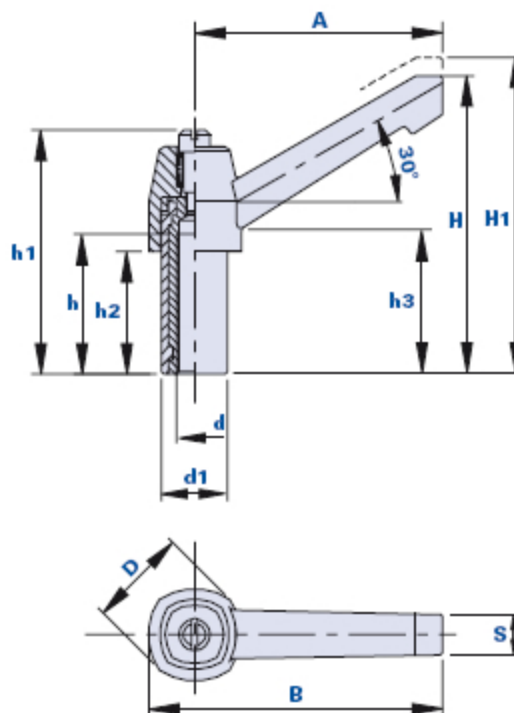

| Code   | Description | Dimensions |      |      |     |      |    |    |      |      |     | Insert |    | Weight grams | Stock |
|--------|-------------|------------|------|------|-----|------|----|----|------|------|-----|--------|----|--------------|-------|
|        |             | A          | B    | D    | S   | H    | H1 | h1 | h3   | d1   | h2  | d      | h  |              |       |
| 0140BS | KP-BA 40 M5 | 40         | 48,3 | 18,6 | 8,5 | 49,5 | 53 | 42 | 30,5 | 12   | 175 | M5     | 20 | 22           | -     |
| 0155DS | KP-BA 55 M8 | 55         | 65   | 22   | 9   | 66   | 60 | 54 | 41,5 | 14,6 | 27  | M8     | 31 | 24           | √     |

### Clamping element and lever material

Polyamide-based (PA) technopolymer. Resistant to organic and inorganic chemical substances such as oils, greases, fuels and solvents.

### Clamping lever colour

Black with satin finish. Other colours for suitable quantities.

### Clamping element colour

Black.

### Bush

Brass. Special inserts on design and/or in nickel-plated brass on request, for suitable quantities.

### Return spring

Burnished steel.

### Stop screw

Galvanized steel, it can be used for the assembly of the lever with nut-runner.

### Package

10 - 50 - 100 pcs.

