



Ball knob with smooth blind hole

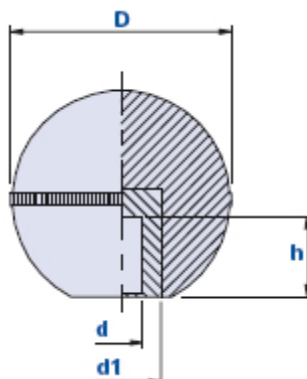

Code	Description	Dimensions		Insert		Weight grams	Stock
		D	d	h			
01SB20C	SB D.20 d.6	20	6	10		6	√
01SB20D	SB D.20 d.8	20	8	10		4	√
01SB25C	SB D.25 d.6	25	6	12		10	√
01SB25D	SB D.25 d.8	25	8	12		9	√
01SB30C	SB D.30 d.6	30	6	15		19	-
01SB30D	SB D.30 d.8	30	8	15		19	√
01SB30E	SB D.30 d.10	30	10	15		18	√
01SB35D	SB D.35 d.8	35	8	17		26	√
01SB35E	SB D.35 d.10	35	10	17		26	√
01SB40D	SB D.40 d.8	40	8	20		34	-
01SB40E	SB D.40 d.10	40	10	20		34	√
01SB40F	SB D.40 d.12	40	12	20		32	√
01SB45D	SB D.45 d.8	45	8	20		46	-
01SB45E	SB D.45 d.10	45	10	20		46	-
01SB45F	SB D.45 d.12	45	12	20		45	√
01SB50D	SB D.50 d.8	50	8	20		53	-
01SB50E	SB D.50 d.10	50	10	14		52	-
01SB50F	SB D.50 d.12	50	12	14		51	√

Material

High resistance phenolyc-based (PF) duroplast.

Resistant to organic and inorganic chemical substances such as oils, greases, fuels and solvents.

Colour

Black with shiny finish with equatorial knurling.

Assembly

Press-fit.

Insert

Polyamide-based technopolymer (PA) bush.

Package

SB 20/25/30/35: 50 - 100 - 200 pcs.

SB 40/45/50: 25 - 50 - 100 pcs.