


## Knurled oil fill plug with dipstick

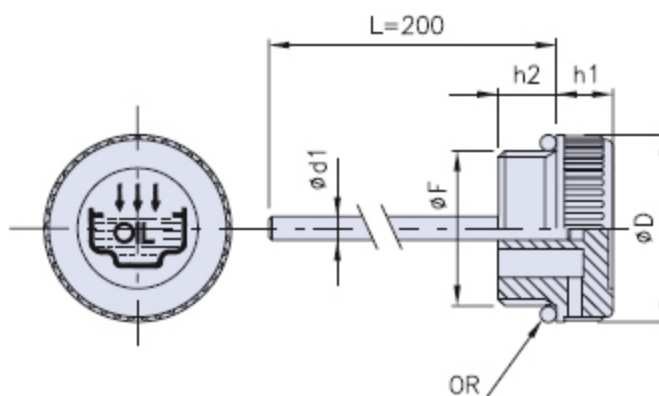

| Code         | Dimensions |      |      |      |    | Stock |
|--------------|------------|------|------|------|----|-------|
|              | F          | D    | h1   | h2   | d1 |       |
| 01TCAZ-14    | G 1/4"     | 20   | 9    | 9    | 4  | -     |
| 01TCAZ-38    | G 3/8"     | 20,5 | 9    | 10   | 4  | -     |
| 01TCAZ-12    | G 1/2"     | 28   | 10,5 | 10,5 | 4  | -     |
| 01TCAZ-34    | G 3/4"     | 31   | 12   | 11   | 5  | -     |
| 01TCAZ-1     | G 1"       | 39   | 12   | 12   | 5  | -     |
| 01TCAZ-114   | G 1 1/4"   | 49   | 13   | 13,5 | 5  | -     |
| 01TCAZ-14.15 | M 14x1.5   | 20   | 9    | 9    | 4  | -     |
| 01TCAZ-16.15 | M 16x1.5   | 20   | 9    | 10   | 4  | -     |
| 01TCAZ-18.15 | M 18x1.5   | 28   | 10,5 | 10   | 4  | -     |
| 01TCAZ-20.15 | M 20x1.5   | 28   | 10,5 | 10   | 4  | -     |
| 01TCAZ-22.15 | M 22x1.5   | 28   | 10,5 | 11   | 4  | -     |

### Material

Plug made from thermoplastic material (Polyamide 66).

Dipstick made from phosphated steel, round section. Seal with 70 Shore synthetic rubber O-Ring.

### Description

Knurled threaded plug with dipstick, 200 mm standard length.

### Colour

Black.

### Notes

The plugs are supplied, as standard equipment, with UNI oil fill graphic symbol and OIL text.

Upon request and for a quantity of least 250 pcs. the dipsticks can be supplied in different lengths and with min-max notches.

### Package

1 - 50 - 100 pcs.