


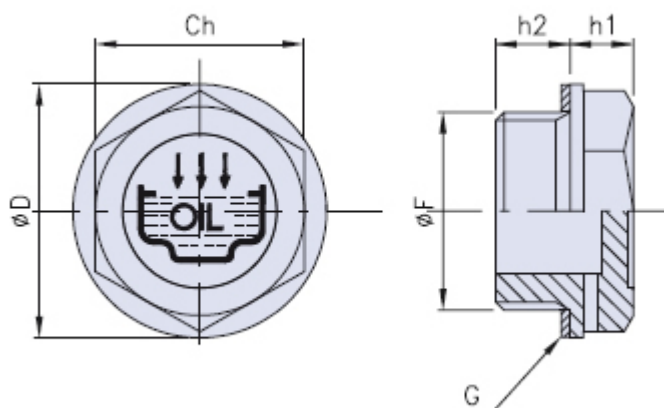

G = Fiber seal

| Code        | Dimensions |    |      |      |      |    | Stock |
|-------------|------------|----|------|------|------|----|-------|
|             | F          | Ch | D    | h1   | h2   | Nm |       |
| 01TCN-14    | G 1/4"     | 17 | 19,5 | 9    | 7    | 5  | -     |
| 01TCN-38    | G 3/8"     | 18 | 22   | 10   | 7,5  | 8  | -     |
| 01TCN-12    | G 1/2"     | 24 | 28   | 11   | 7,5  | 9  | -     |
| 01TCN-34    | G 3/4"     | 30 | 34   | 11   | 9    | 11 | -     |
| 01TCN-1     | G 1"       | 35 | 42   | 12   | 10,5 | 20 | -     |
| 01TCN-114   | G 1 1/4"   | 42 | 51   | 13,5 | 12   | -  | -     |
| 01TCN-112   | G 1 1/2"   | 50 | 58   | 16   | 10   | -  | -     |
| 01TCN-2     | G 2"       | 64 | 74   | 16   | 12   | -  | -     |
| 01TCN-10.15 | M 10x1.5   | 18 | 22   | 9    | 7    | 5  | -     |
| 01TCN-12.15 | M 12x1.5   | 18 | 22   | 9    | 7    | 5  | -     |
| 01TCN-14.15 | M 14x1.5   | 17 | 19,5 | 9    | 7    | 5  | -     |
| 01TCN-16.15 | M 16x1.5   | 18 | 21   | 10   | 7,5  | 6  | -     |
| 01TCN-18.15 | M 18x1.5   | 21 | 26   | 10   | 7,5  | 7  | -     |
| 01TCN-20.15 | M 20x1.5   | 24 | 28   | 10   | 8    | 8  | -     |
| 01TCN-22.15 | M 22x1.5   | 24 | 28   | 11   | 8    | 10 | -     |
| 01TCN-40.15 | M 40x1.5   | 42 | 52   | 13   | 10   | -  | -     |

### Material

Plug made from thermoplastic material (Polyamide 66) ensuring high mechanical resistance at both low and high temperatures. Dimensional stability and shock resistance. Flat asbestos-free fiber seal.

### Description

Hex head threaded plug.

### Colour

Black. Red also available for suitable quantities.

**Notes**

The plugs are supplied, as standard equipment, with UNI oil fill graphic symbol and OIL text.

**Package**

1 - 50 - 100 pcs.