
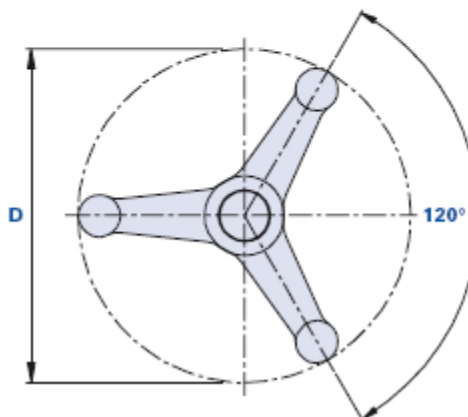


## 3-arm handwheel

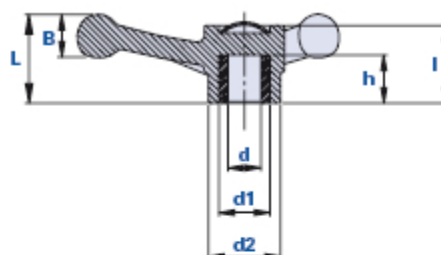

| Code   | Description     | Dimensions |    |    |    |    | Insert |    |    | Weight grams | Stock |
|--------|-----------------|------------|----|----|----|----|--------|----|----|--------------|-------|
|        |                 | D          | L  | B  | d2 | l  | dH7    | h  | d1 |              |       |
| 01392E | TR 392/D.145/10 | 145        | 44 | 24 | 38 | 37 | 10     | 26 | 20 | 140          | ✓     |
| 01392F | TR 392/D.145/12 | 145        | 44 | 24 | 38 | 37 | 12     | 26 | 20 | 140          | ✓     |
| 01392H | TR 392/D.145/15 | 145        | 44 | 24 | 38 | 37 | 15     | 26 | 25 | 140          | ✓     |
| 01392I | TR 392/D.145/16 | 145        | 44 | 24 | 38 | 37 | 16     | 26 | 25 | 141          | ✓     |
| 01392L | TR 392/D.145/17 | 145        | 44 | 24 | 38 | 37 | 17     | 26 | 28 | 142          | ✓     |
| 01392M | TR 392/D.145/18 | 145        | 44 | 24 | 38 | 37 | 18     | 26 | 28 | 144          | ✓     |
| 01392N | TR 392/D.145/20 | 145        | 44 | 24 | 38 | 37 | 20     | 26 | 28 | 146          | ✓     |
| 01492E | TR 492/D.180/10 | 180        | 48 | 24 | 39 | 37 | 10     | 26 | 20 | 200          | ✓     |
| 01492H | TR 492/D.180/15 | 180        | 48 | 24 | 39 | 37 | 15     | 26 | 25 | 190          | ✓     |
| 01492I | TR 492/D.180/16 | 180        | 48 | 24 | 39 | 37 | 16     | 26 | 25 | 180          | ✓     |
| 01492L | TR 492/D.180/17 | 180        | 48 | 24 | 39 | 37 | 17     | 26 | 28 | 160          | ✓     |
| 01492M | TR 492/D.180/18 | 180        | 48 | 24 | 39 | 37 | 18     | 26 | 28 | 166          | ✓     |
| 01492N | TR 492/D.180/20 | 180        | 48 | 24 | 39 | 37 | 20     | 26 | 28 | 372          | ✓     |
| 01382E | TR 382/D.220/10 | 220        | 64 | 30 | 39 | 48 | 10     | 38 | 20 | 228          | ✓     |
| 01382H | TR 382/D.220/15 | 220        | 64 | 30 | 39 | 48 | 15     | 38 | 25 | 240          | -     |
| 01382I | TR 382/D.220/16 | 220        | 64 | 30 | 39 | 48 | 16     | 38 | 25 | 250          | ✓     |
| 01382L | TR 382/D.220/17 | 220        | 64 | 30 | 39 | 48 | 17     | 38 | 28 | 324          | ✓     |
| 01382M | TR 382/D.220/18 | 220        | 64 | 30 | 39 | 48 | 18     | 38 | 28 | 342          | ✓     |
| 01382N | TR 382/D.220/20 | 220        | 64 | 30 | 39 | 48 | 20     | 38 | 28 | 270          | ✓     |
| 01382O | TR 382/D.220/22 | 220        | 64 | 30 | 39 | 48 | 22     | 38 | 28 | 280          | -     |

**Material**

Polyamide-based (PA) technopolymer. Resistant to organic and inorganic chemical substances such as oils, greases, fuels and solvents.

**Colour**

Black with satin finish.  
Other colours for suitable quantities.

**Insert**

Galvanized steel with standard blind hole with tolerance H7. On request supplied with pass-through insert.  
Special inserts on design and/or in brass/stainless steel, on request for suitable quantities.

**Cap**

Standard cap colour black; orange RAL 2004 on request, shiny finish.  
Press-fit assembly, easily removable.  
On request, customization with other colours, logo and/or graphics, for suitable quantities.

**Remarks**

On request, for small/medium quantities, we execute threaded holes for fixing the handwheel on the shaft or keyways.

**Package**

1 - 5 - 10 pcs.