


# 1046F



## Manija de puente con casquillos roscados ciegos

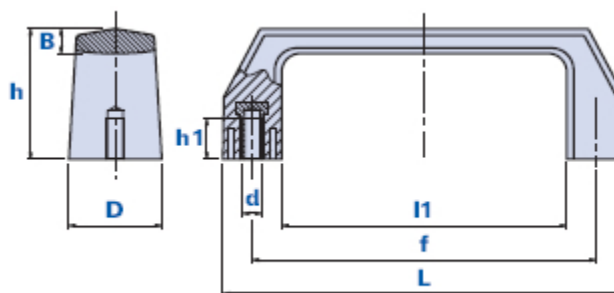

| Código       | Descripción  | Dimensiones |    |    |   |    |     | Inserto |    | Peso en gramos | Stock |
|--------------|--------------|-------------|----|----|---|----|-----|---------|----|----------------|-------|
|              |              | L           | D  | h  | B | l1 | f   | d       | h1 |                |       |
| 1046F0120500 | 1046F-120-M5 | 120         | 27 | 37 | 8 | 88 | 105 | M5      | 8  | 64             | -     |
| 1046F0120600 | 1046F-120-M6 | 120         | 27 | 37 | 8 | 88 | 105 | M6      | 8  | 64             | √     |
| 1046F0136500 | 1046F-136-M5 | 136         | 30 | 41 | 8 | 98 | 117 | M5      | 13 | 64             | -     |
| 1046F0136600 | 1046F-136-M6 | 136         | 30 | 41 | 8 | 98 | 117 | M6      | 13 | 64             | √     |
| 1046F0136800 | 1046F-136-M8 | 136         | 30 | 41 | 8 | 98 | 117 | M8      | 13 | 64             | √     |

### Material

Tecnopolímero de base poliamídica (PA). Resistente a sustancias químicas orgánicas e inorgánicas como aceites, grasas, carburantes y disolventes.

### Color

Negro, acabado satinado.

Otros colores para cantidades adecuadas.

### Inserto

Latón.

### Envase

10 - 50 - 100 piezas.