


Bouton cannelé avec tige filetée

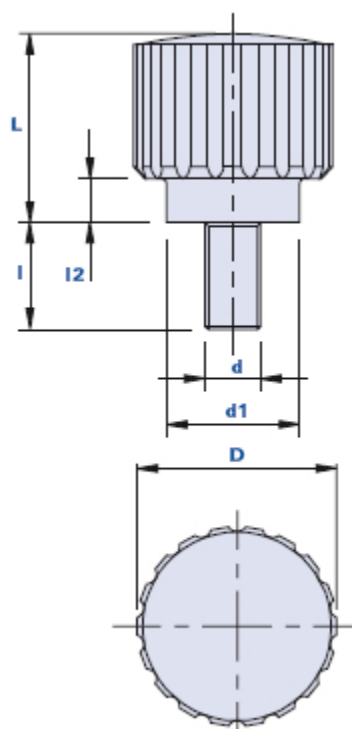

Code	Description	Dimensions				Insert		Poids grammes	Stock
		D	L	d1	l2	d	l		
01200C1A10	200C1/15 M4x10	15	12	11	1,5	M4	10	4	✓
01200C2B10	200C2/15 M5x10	15	12	11	1,5	M5	10	5	✓
01200C2B20	200C2/15 M5x20	15	12	11	1,5	M5	20	6	✓
01200C3B13	200C3/18 M5x13	18	17	12	4	M5	13	8	✓
01200C4C13	200C4/18 M6x13	18	17	12	4	M6	13	10	✓
01200C5B40	200C5/24 M5x40	24	17	16	5,5	M5	40	14	✓
01200C5C15	200C5/24 M6x15	24	17	16	5,5	M6	15	14	✓
01200C5C40	200C5/24 M6x40	24	17	16	5,5	M6	40	16	✓
01200C6D15	200C6/24 M8x15	24	17	16	5,5	M8	15	18	✓
01200C6D25	200C6/24 M8x25	24	17	16	5,5	M8	25	20	✓

Matériau

Matière plastique thermodurcissable à base phénolique (PF) à haute résistance. Résistant aux substances chimiques organiques et inorganiques telles que les huiles, les graisses, les carburants et les solvants.

Couleur

Noir avec finition brillante.

Insert

Acier galvanisé.

Emballage

25 - 50 - 100 pièces.

