


Adjustable clamping lever with threaded bush

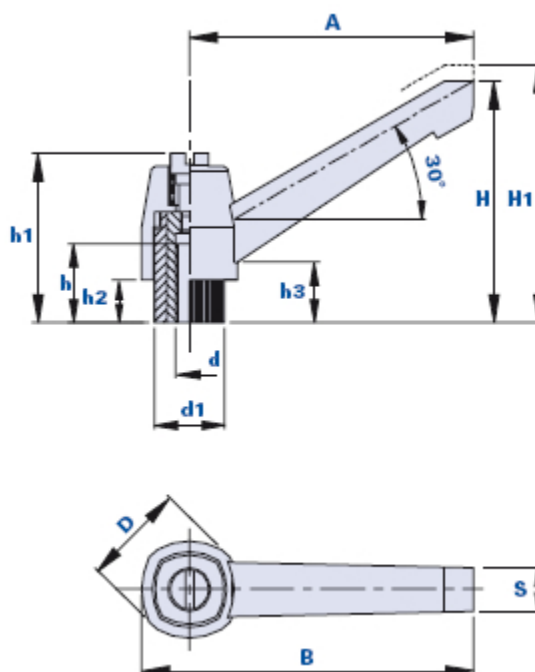

Code	Description	Dimensions										Insert		Weight grams	Stock
		A	B	D	S	H	H1	h1	h3	d1	h2	d	h		
0140B	KP-B 40 M5	40	48,3	18,6	8,5	39	42,5	31,5	13	12	7	M5	12	22	✓
0140C	KP-B 40 M6	40	48,3	18,6	8,5	39	42,5	31,5	13	12	7	M6	14	14	✓
0155C	KP-B 55 M6	55	65	22	9	49	53	37	14,5	15	10	M6	14	26	✓
0155D	KP-B 55 M8	55	65	22	9	49	53	37	14,5	15	10	M8	14	24	✓
0179D	KP-B 79 M8	80	93,5	29	11,5	68	72,5	48	18	20	12	M8	20	56	✓
0179E	KP-B 79 M10	80	93,5	29	11,5	68	72,5	48	18	20	12	M10	20	55	✓
0179F	KP-B 79 M12	80	93,5	29	11,5	68	72,5	48	18	20	12	M12	20	57	✓
01100F	KP-B 100 M12	102	119	38	17	85	89,5	60	22	25	12	M12	25	113	✓
01100N	KP-B 100 M14	102	119	38	17	85	89,5	60	22	25	12	M14	25	124	✓
01100P	KP-B 100 M16	102	119	38	17	85	89,5	60	22	25	12	M16	18	119	✓
0140BA	KP-B 40 M5 RAL 2004	40	48,3	18,6	8,5	39	42,5	31,5	13	12	7	M5	12	22	-
0140CA	KP-B 40 M6 RAL 2004	40	48,3	18,6	8,5	39	42,5	31,5	13	12	7	M6	14	14	-
0155CA	KP-B 55 M6 RAL 2004	55	65	22	9	49	53	37	14,5	15	10	M6	14	26	-
0155DA	KP-B 55 M8 RAL 2004	55	65	22	9	49	53	37	14,5	15	10	M8	14	24	-
0179DA	KP-B 79 M8 RAL 2004	80	93,5	29	11,5	68	72,5	48	18	20	12	M8	20	56	-
0179EA	KP-B 79 M10 RAL 2004	80	93,5	29	11,5	68	72,5	48	18	20	12	M10	20	55	-
0179FA	KP-B 79 M12 RAL 2004	80	93,5	29	11,5	68	72,5	48	18	20	12	M12	27	57	-

Clamping element and lever material

Polyamide-based (PA) technopolymer. Resistant to organic and inorganic chemical substances such as oils, greases, fuels and solvents.

Clamping lever colour

Black, orange RAL 2004. Satin finish.

Other colours for suitable quantities.

Clamping element colour

Black.

Bush

Galvanized steel. Special inserts on design and/or in brass on request, for suitable quantities.

Return spring

Burnished steel.

Stop screw

Galvanized steel. It can be used for the assembly of the lever with nut-runner.

Package

10 - 50 - 100 pcs.